


# Tuscany 30" Grill Maintenance Manual

## Replace the Manifold:


1. Remove the main cooking grates and flavor grids.

2. Using a 1/4" socket remove the (3) screws holding the rear heat shield and burners in place.

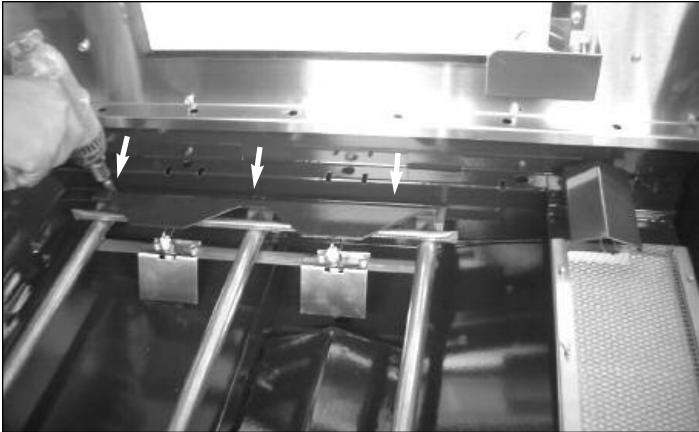

3. Disconnect the wires from the main burner igniter.


**NOTE: Make sure the wire does not fall into the access hole.**

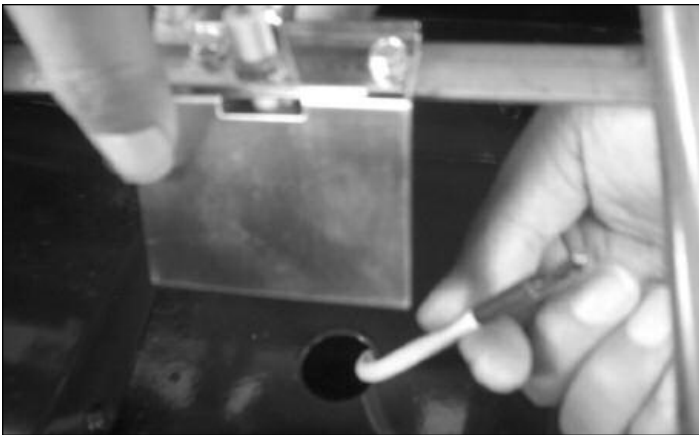


4. Angle the main burner up, and set it in the firebox.



5. Remove the (3) screws holding the Front Bottom IR Igniter Mounting Bracket to the burner and Front Heat Shield. Then remove the bracket.

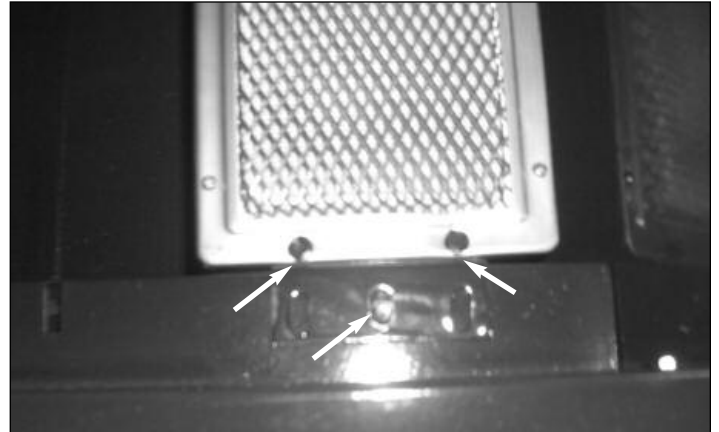


6. Remove the (6) screws holding the Front Heat Shield in position. Then lift the Front Heat Shield out of the firebox.

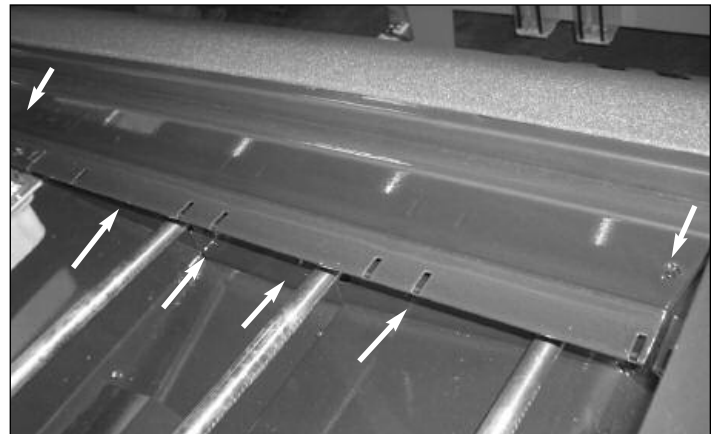

7. Hold the elbow on the rear IR burner valve and use a 3/4" wrench to disconnect the flex line from it.


**Note: Be careful, applying pressure to the elbow of the valve may cause it to break.**

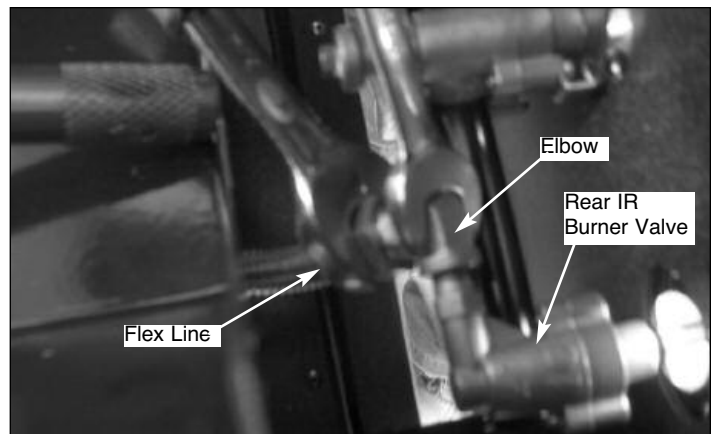

# Tuscany 30" Grill Maintenance Manual

## Replace the Manifold:

8. Hold the elbow on the Bottom IR Burner Valve and use adjustable wrench to remove the flex line from it.

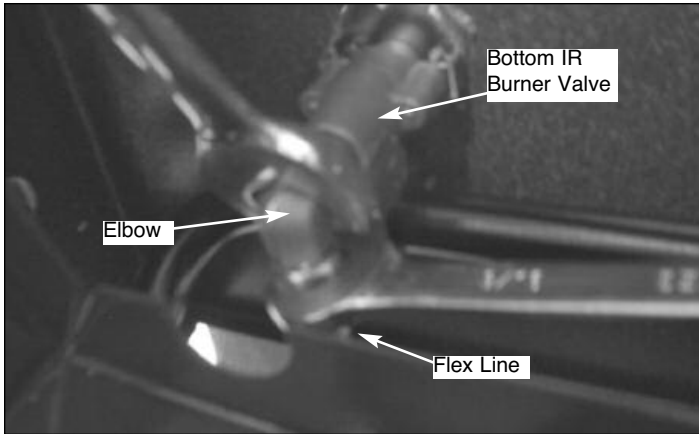


9. Remove all the knobs, set the knobs aside.



10. Remove the screws holding the main burner knob bezels to the front face and remove the bezels.



11. Hold the manifold, slightly move it to the right and lift the left end out.

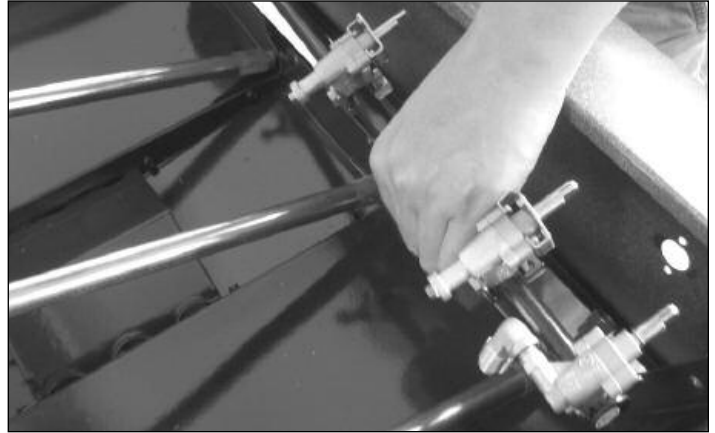

12. Lift the left end of the manifold up, carefully remove the manifold out of the grill.



13. Take the old manifold away.

14. Place the new manifold into the grill body with the control knob stems facing outward through control panel front.

15. Reattach the flex line on the right side of the grill to the Bottom IR Burner Valve by using the adjustable wrench.

16. Reattach the flex line on the left side of the grill to the Rear IR Burner Valve by using the adjustable wrench.

**Note:** Be careful, applying pressure to the elbow of the valve may cause it to break.

17. Reattach the bezels to the manifold with the screws removed in Step 10. Make sure that "off" is facing up on the bezel.

# Tuscany 30" Grill Maintenance Manual

---

## **Replace the Manifold:**

18. Reattach the control knobs onto the manifold stems, making sure the arrows are facing upwards.

19. Reinstall burners into the grill body. Line up the burners with the valves on the manifold, making sure they are level.

20. Connect the igniter wires to the igniter.

21. Use the screws removed in step 4 to secure the rear heat shield and burners in place.

22. At this point of the replacement, a leak test should be performed on all fittings. See Use and Care manual for leak testing procedure.

23. Proceed with reattaching the front heat shield.

24. Reinstall the flavor grids and cooking grates.

**The replacement is done, you can enjoy your grill now.**